

Energy comparison of sequential and integrated CO₂ capture and electrochemical conversion

Received: 6 January 2022

Accepted: 6 September 2022

Published online: 14 September 2022

 Check for updates

Mengran Li¹, Erdem Irtem¹, Hugo-Pieter Iglesias van Montfort¹,
Maryam Abdinejad¹ & Thomas Burdyny¹ ✉

Integrating carbon dioxide (CO₂) electrolysis with CO₂ capture provides exciting new opportunities for energy reductions by simultaneously removing the energy-demanding regeneration step in CO₂ capture and avoiding critical issues faced by CO₂ gas-fed electrolyzers. However, understanding the potential energy advantages of an integrated process is not straightforward due to the interconnected processes which require knowledge of both capture and electrochemical conversion processes. Here, we identify the upper limits of the integrated process from an energy perspective by comparing the working principles and performance of integrated and sequential approaches. Our high-level energy analyses unveil that an integrated electrolyser must show similar performance to the gas-fed electrolyser to ensure an energy benefit of up to 44% versus the sequential route. However, such energy benefits diminish if future gas-fed electrolyzers resolve the CO₂ utilisation issue and if an integrated electrolyser shows lower conversion efficiencies than the gas-fed system.

Carbon dioxide (CO₂) capture and subsequent conversion represents a promising route for the production of fossil-fuel-free fuels and feedstocks from waste CO₂. In the past two decades, these capture and conversion steps have separately been advanced through innovations that have led to continuously lower implementation costs and higher energy efficiencies for each process¹. For example, CO₂ capture can be operated at an overall cost of US\$50–150 to capture one tonne of CO₂ using commercially mature amine scrubbing processes from industrial sources^{2,3}. Capture processes also show the potential to operate using alkaline capture sorbents⁴ at \$94–232 or solid sorbents^{5,6} at about \$600 to capture one tonne of CO₂ from the air. On the conversion side, low-temperature CO₂ electrolyzers using pure CO₂ feeds have achieved a current density beyond 1 A cm⁻² to convert CO₂ selectively to feedstocks (e.g., carbon monoxide (CO) and ethylene (C₂H₄))^{7–10}. However, CO₂ electrolysis requires efforts to better define its role with the upstream CO₂ capture and downstream separation processes and understand the impacts of the processes-





associated energy penalties (e.g. electrolyte recovery, product separation)^{11,12}.

Given the eventual need to combine CO₂ capture and electrochemical conversion processes, and the diminishing energy efficiency returns from optimizing each process separately, researchers have considered the techno-economic and energy benefits of integrating capture and conversion^{13,14}. For chemical processes, the discussion of whether 'to integrate, or not to integrate' CO₂ capture processes with conversion has been proposed to reduce overall energy requirements. For example, in a techno-economic study, CO₂ capture and chemical conversion showed a potential energy advantage of up to 46% when integrated to produce chemicals such as methyl formate from hydrogen, CO₂, and methanol (where the methanol serving as the capture media) at high pressures^{15,16}. With the potential for CO₂ electrolysis at room temperature to act as a means of CO₂ conversion, we ask a similar question: does an integrated CO₂ capture and conversion process offer potential energy or process advantages over a sequential

¹Materials for Energy Conversion and Storage (MECS), Department of Chemical Engineering, the Delft University of Technology, van der Maasweg 9, 2629 HZ Delft, The Netherlands. ✉e-mail: t.e.burdyny@tudelft.nl

capture and electrochemical conversion process? Here an integrated approach implies that the electrochemical process converts the captured CO₂ (e.g., carbamate and bicarbonate) in a captured medium. In this work, we construct and compare these two scenarios to answer two key questions: (1) does an integrated route have energy advantages over the sequential route; (2) what performance metrics need to be met within the integrated electrolysis for such a route to be viable?

The scope of this work is limited to the CO₂ capture process based on commercially available monoethanolamine-based amine scrubbing techniques and the CO₂ electrochemical conversion to CO in gas-fed electrolyzers and amine-based capture media. Shown in Fig. 1 are two comparable scenarios for a sequential capture and conversion process (Fig. 1a) and an envisioned integrated approach based on CO₂-to-CO in amine capture media (Fig. 1b). In the sequential route, the captured CO₂ is released at high purity via an amine-scrubbing step and then compressed and fed as a gas to a CO₂ electrolyser unit. Product separation and (bi)carbonate regeneration processes are included in the conversion step. The product is diluted due to the presence of unreacted CO₂ and needs to be separated from CO₂ through pressure-swing adsorption. In the CO₂ gas-fed electrolyser unit, CO₂ gas tends to form carbonate and bicarbonate ions (denoted as (bi)carbonates) by reacting with the hydroxide ions from electrochemical reduction (i.e., CO₂ reduction and hydrogen evolution reaction), as shown in reactions (1) – (5). Usually, only less than 50% of CO₂ gas molecules consumed in the electrolyser contribute to CO production^{17–19}. The (bi) carbonates could either cross over the membrane²⁰ to the anolyte or precipitate at the cathode²¹. The (bi)carbonates in the electrolyte can be regenerated back to CO₂ gas and hydroxide anolyte by reacting calcium hydroxide to form calcium carbonate precipitates. The precipitates will then be calcinated to release CO₂ and produce calcium oxide that will be hydrated to become calcium hydroxide in the final step⁴.



In an integrated process, there is an opportunity for the CO₂ electrolyser to displace the stripper unit by converting the captured CO₂ while regenerating the capture medium simultaneously^{22,23} (see Fig. 1b). In the amine-scrubbing cases, such a displacement could save 88–203 kJ mol_{CO₂}⁻¹ from amine regeneration^{24–29} and 14–19 kJ mol_{CO₂}⁻¹ for compression^{25,30}, which accounts for up to 90% of the total energy consumption of the capture process³¹. In the integrated route, the CO₂-rich amines, containing substantially less free CO₂ (i.e., both CO₂ (g) and CO₂ (aq))^{32,33}, are directly fed into the integrated electrolyzers. Although hydroxide ions are still produced from the electroreduction reactions, they will not form (bi)carbonate in the integrated electrolysis, because the majority of the captured CO₂ molecules are in the form of carbamate and bicarbonate. As such, the integrated electrolysis inherently avoids CO₂ gas loss faced by the gas-fed electrolyzers^{18,34–38}. It is important to note that the formation of bicarbonate in the CO₂ absorber (usually when CO₂ loading is >0.5 mol_{CO₂} mol_{amine}⁻¹) is not deemed as CO₂ loss, because it does not require a (bi)carbonate regeneration unit to recover CO₂. Therefore, there is no need for the integrated route to include a (bi)carbonate regeneration unit. If fulfilled, the integrated process may save >254 kJ mol_{CO₂}⁻¹ to recover the CO₂ and hydroxide from the (bi)carbonates^{4,18}. Finally, the sequential route requires an additional 14.5 – 36.4 kJ mol_{CO₂}⁻¹ for product separation^{39–41}, which is avoided in the integrated case due to the spontaneous release of gas products from the capture

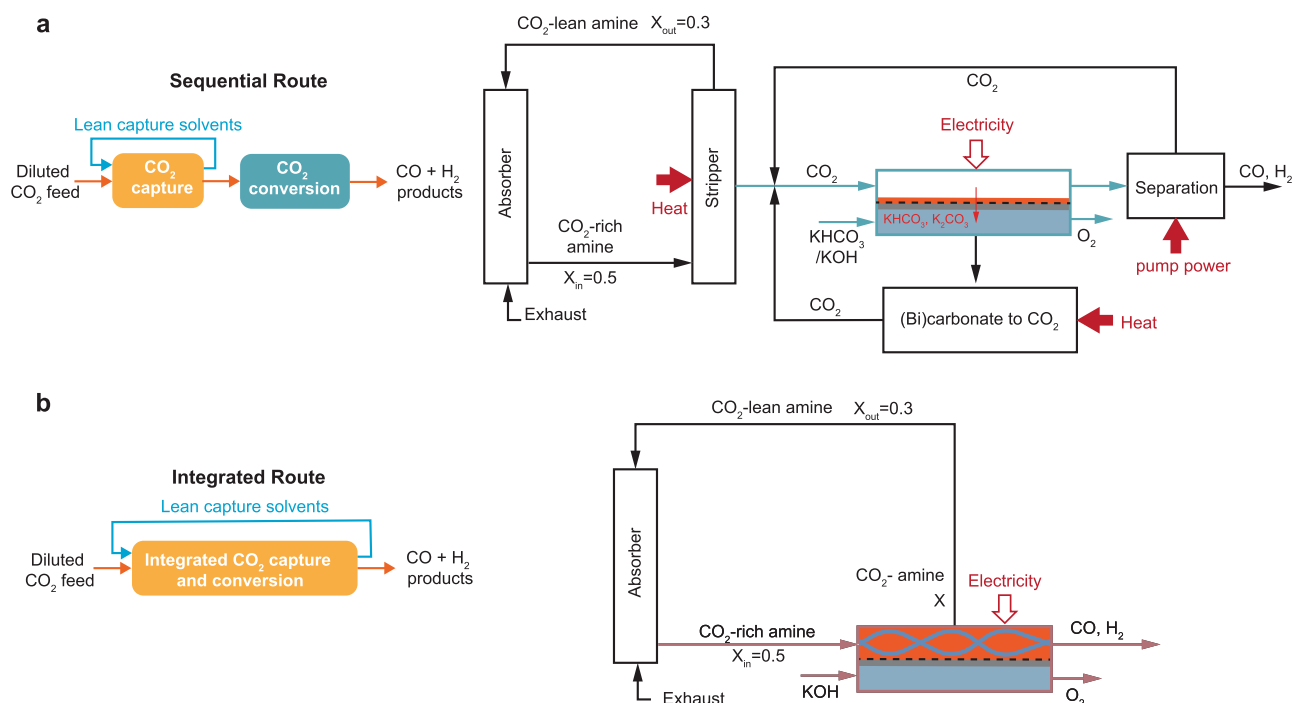



Fig. 1 | Sequential and integrated routes of CO₂ capture and conversion.

a Schematic illustration and block diagrams of the sequential route for amine-based CO₂ capture and electrolysis to produce CO. CO₂ electrolyser is based on membrane-electrode assemblies. **b** Schematic illustration and block flow diagrams

of integrated CO₂ capture and direct CO₂ electroreduction from capture medium. The compression unit between stripper and electrolyser is not shown in the block diagram. The CO₂ loadings of the CO₂-rich (X_{in}) and CO₂-lean amine (X_{out}) streams are assumed based on Gjernes et al. report²⁴.

media as a result of their low solubility (e.g., 1 mM for CO and 5 mM for C₂H₄ at 20 °C and 1 atm)⁴². Such a high-level analysis indicates that an ideal integrated route could save a total energy benefit of about 500 kJ mol_{CO₂}⁻¹ when converting CO₂ to CO versus the sequential route.

However, there should be additional requirements for integrated electrolysis to be beneficial and replace amine regeneration and CO₂ compression in the sequential process. For instance, the integrated electrochemical conversion step needs to show at least similar performance metrics (cell voltage, Faradaic efficiency, and current densities) as the gas-fed electrolyzers in the sequential process. Otherwise, energy gains for the overall process may be offset by the increased electrolyser energy requirements. Therefore, it is not straightforward to compare the energy benefits of an integrated process, thus warranting a more detailed analysis to help determine the upper limits of this new research direction.

Despite a number of reports on integrated electrolysis, their current performance is inferior to the gas-fed electrolysis system owing in part to their earlier development^{22,43–47} (see Fig. 2) Regardless as the process can be evaluated as a function of performance metrics it is possible to forecast required performance targets at this early stage. Here, we compare the sequential and integrated scenarios from this high-level energy perspective, bringing in a wealth of current knowledge from both fields to give a perspective on the outlook of integrated CO₂ capture and electrochemical conversion. To perform this analysis, we compare the performance and working principles of the gas-fed and integrated electrolyzers and discuss the essential roles of product Faradaic efficiency and cell voltages in the overall energy consumption to convert CO₂ into CO. Hydrogen is usually evolved as a side product together with CO₂ conversion, and CO product is mainly used together with hydrogen as the feedstock for downstream chemical manufacturing⁴⁸. As such, this study is mainly focused on the energy required for CO₂ abatement over the CO₂ capture and conversion process. We then compare the sensitivity of various parameters to observe the parameter space where each process is favourable, which gives clear and targeted performance metrics for the novel integrated electrochemical conversion process. We finally conclude with an outlook on challenges and future potential for the integrated routes.

Results

Performance comparison for the gas-fed and integrated electrolysis

Here we compare the operation of existing gas-fed CO₂ electrolyzers with future integrated electrolyzers. We discuss the performance metrics for both conversion processes in-depth to provide a perspective on the comparative energy consumption of each route under different scenarios. We propose to gauge these two electrolyser types using the energy required to electrochemically convert one mole CO₂, which can be calculated from Eq. (6). The calculated energy is independent of the current densities, which allows us to compare these two electrolyzers despite the levels of current densities achieved in prior literature.

As shown in Fig. 2a, the blue region highlights the energy requirement to produce CO with varied Faradaic efficiencies and cell voltages⁴⁹. Overlaid within Fig. 2a are the existing state-of-the-art Faradaic efficiencies and current densities for the gas-fed electrolysis (blue circles). The integrated electrolysis (red circles) is relevant to the integrated route described in Fig. 1. For context, Fig. 2b communicates that product Faradaic efficiency has a more profound impact on energy consumption toward target CO than the cell voltages.

Gas-fed CO₂ electrolysis to produce CO. As a more advanced reaction, the gas-fed electrolyser outperforms the integrated electrolyser in product selectivity, current densities, and energy efficiency^{22,43}. (see Fig. 2a) The state-of-the-art gas-fed CO₂ electrolyzers can be operated at >100 mA cm⁻² with a cell voltage below 3–3.5 V and a product Faradaic efficiency of 80–90% (e.g., CO), as seen in Supplementary Table 3. When converting these performance metrics into the energy required to convert CO₂ into CO, we can estimate the benchmark gas-fed electrolyser to be in the range of 600–800 kJ mol_{CO₂-converted}⁻¹. Our analysis uses only near-room-temperature flow cells and membrane-electrode assemblies (MEAs) for CO₂-to-CO as the model for the sequential route because this technology has a relatively high level of technical readiness^{49–51}.

In gas-fed CO₂ electroreduction, the dissolved CO₂ in water is the main catalytically reactant for the conversion, with CO₂ transported from a nearby gas phase^{52,53}. High rates (up to 1 A cm⁻²) are achieved by

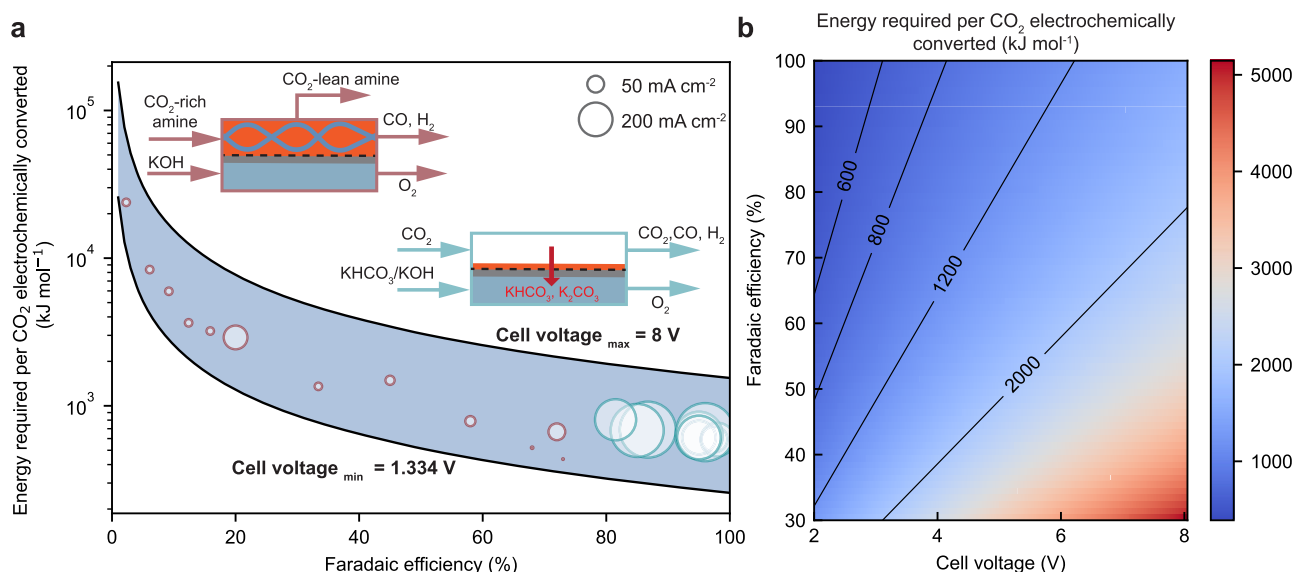


Fig. 2 | Energy required to convert CO₂ to CO for gas-fed CO₂ electrolyser and direct CO₂ electrochemical upgrade from capture medium. **a** The energy required to convert CO₂ to CO as a function of CO Faradaic efficiency with recently reported values for two different CO₂ electrolyzers. Detailed data and references are summarized in Tables S2 and S3. The bubble size represents the magnitude of

current densities for these cells as indicated in the legend. The insets illustrate the operating conditions of these two cells. **b** Impacts of CO Faradaic efficiency and cell voltages on the energy required of the CO₂ electrolyzers. The solid lines indicate the Faradaic Efficiency vs. Cell voltage trends at certain energy requirements as indicated inline.

applying gas-diffusion electrodes^{8–10}, where the gases are transported from the gas channel to the catalyst facing the liquid electrolyte. Therefore, maintaining a stable electrode wettability is challenging for long-term operation²¹.

In these gas-fed systems, the CO₂ utilisation efficiency is usually low (e.g., capped at 50% if producing CO) due to carbonation between CO₂ and hydroxide ions (OH⁻) at the cathode interface^{18,34,35}. In an MEA configuration using an anion-exchange membrane, the (bi)carbonates migrated to the anode are reported to evolve back to CO₂^{36–38}. Such CO₂ evolution should occur at the cost of increasing anode overpotentials by negatively affecting the anode reaction environment and the anode catalysts⁵⁴. When the carbonate requires regeneration into CO₂, an energy penalty of at least 254 kJ mol_{CO₂-converted}⁻¹ is associated with it in the case of 50% CO₂ utilisation efficiency. Our analysis then takes this energy penalty into account.

We acknowledge the recent efforts that attempt to remove the energy penalty associated with carbonate formation and low CO₂ utilisations, but these have not been demonstrated substantial overall performance metrics as compared to those presented in Fig. 2a. Such strategies use acidic environments and bipolar membranes to introduce protons to regenerate carbonate^{17,55} or optimize local reaction environments or operating conditions^{20,56}. For simplicity of this analysis, however, our analysis assumes a gas-fed CO₂ conversion of 50% with additional steps for product separation and carbonate regeneration processes.

Electrolysis of the captured CO₂ in amine solutions. In contrast to the gas-fed system above, reported electroreduction of captured CO₂ in monoethanolamine solutions presently has a higher energy requirement at low current densities (Fig. 2a and Supplementary Tables 1–2). The higher energy requirement of the integrated system is a result of the lower CO selectivity than the gas-fed systems. With further research efforts, these metrics are expected to improve.

In these systems, most cell potentials were unreported as it was not a primary part of the analysis. Hence, in order to populate Fig. 2a for the integrated case, we estimated the potentials associated with the anode, membrane, and electrolytes to perform a parameter sweep and evaluate the energy consumption for conversion (see Supplementary Note 1). Taking Lee et al.'s result as an example, the estimated cell voltage is 3 V to achieve 100 mA cm⁻² assuming the amine solution has the same ionic conductivity of 1 M KOH aqueous solution (21.5 S m⁻¹ for 1 M KOH solution^{22,57}). The amine aqueous solution has a lower ionic conductivity than inorganic electrolyte (i.e. 3.7 S m⁻¹ for 5 M monoethanolamine solutions with about 0.4 mol_{CO₂} mol_{amine}⁻¹⁵⁸ as compared to 21.5 S m⁻¹ for 1 M KOH solution⁵⁷). The ionic conductivity of the capture media can be effectively improved by including inorganic salts, such as K₂SO₄ and KCl^{22,58}. As a result, the ohmic loss from the capture solvent can be significantly reduced, which is shown in Supplementary Fig. 1.

Further, The halide ions can serve as inhibitors to prevent oxidative degradation of amines^{59,60}, and the alkali cations are effective in promoting CO₂ electrochemical conversion^{22,58,61}. Buvik et al.⁶⁰ also reported that the NaCl and KI salts show negligible impacts on the CO₂ capture capacity of the 30 wt% monoethanolamine solution. Nevertheless, further research efforts are needed to investigate the impacts of other inorganic salts on the properties of the capture media and the CO₂ absorption performance.

Due to the low CO Faradaic efficiency, the electrolysis of the existing early reports for captured CO₂ are at an energy consumption of 800–10⁴ kJ mol_{CO₂}⁻¹, as compared to the 600–800 kJ mol_{CO₂}⁻¹ for the gas-fed system. From a state-of-the-art perspective, substantial energy reductions in the integrated electrolysis process are needed to make the overall integrated route more energetically favourable. The most straightforward path to reduce the energy load is through an increase in Faradaic efficiency for CO, which requires an

understanding of the underlying mechanisms and catalytically active species (e.g., carbamate ions, bicarbonate, or CO₂) dominating the conversion process. The outlook at the end of this article provides a detailed discussion of the mechanism for electrochemical CO₂ conversion and its challenges. To continue the analysis in Fig. 3, we put aside the performance metrics achieved in existing integrated reports and instead use three performance cases to see the energy comparison versus the sequential route.

Determination of dominant energy contributors

With the conversion processes described for the sequential and integrated routes, we can compare the expected energy requirement for both routes shown in Fig. 1 through a mass and energy balance. A detailed description of the models can be found in Supplementary Note 2, Supplementary Fig. 2, Supplementary Fig. 3 and Supplementary Table 4.

Here Fig. 3 explores the potential energy advantages of the integrated route under optimistic, baseline, and pessimistic performance metric scenarios for the electrolysis processes. Detailed conditions for these scenarios are summarized in Table 1 using the two most critical parameters for the integrated electrolysis process: CO Faradaic efficiency and cell voltage. The sequential route cases assume the gas-fed electrolyser to be operated at 3 V, 90% CO Faradaic efficiency, and 50% single-pass conversion. The 50%-CO₂-utilisation case assumes 50% of the reacted CO₂ convert to (bi)carbonate, while the 100% case assumes all the reacted CO₂ convert to CO molecules. It is important to note that the current density is not considered in the energy analysis, because current density pre-determines the size and capital expense of the electrolysers, which is outside the scope of this work.

Our baseline condition is based on Lee et al.'s report that the Ag-coated ePTFE electrode can achieve 72% CO Faradaic efficiency at -0.8 V vs. reversible hydrogen electrode in monoethanolamine aqueous solutions. We believe the current densities can be further improved if applying hydrophilic 3D porous flow-through electrodes, as very recently reported by Zhang et al.⁵² for the application of direct bicarbonate electroreduction. In the optimistic case, we anticipate the integrated electrolyser can perform similarly to the current gas-fed electrolyser. The pessimistic scenario assumes the future integrated electrolyser can only achieve a 40% CO Faradaic efficiency at a relatively large cell potential. All these three electrolysers are assumed to regenerate the capture media to a CO₂ loading at 0.3 mol_{CO₂} mol_{amine}⁻¹. We compared the sequential and integrated routes in terms of total energy, thermal energy and electricity, and energy cost.

In the sequential route, the energy consumption is shown to be dominated by CO₂ electrochemical conversion to produce CO, which includes CO₂ electrolysis (643 kJ mol_{CO₂}⁻¹) and (bi)carbonate regeneration (254 kJ mol_{CO₂}⁻¹). The CO₂ capture requires amine regeneration energy (179 kJ mol_{CO₂}⁻¹⁸), CO₂ compression after capture (17 kJ mol_{CO₂}⁻¹), and product purification (51 kJ mol_{CO₂}⁻¹). These are all in terms of the amount of converted CO₂. Here the primary energy for the CO₂ electrolysis, compression, and product purification (based on pressure-swing adsorption) is electric work, but for (bi)carbonate and amine regeneration it is mainly inputted heat. The gas-fed CO₂ electrolyser was assumed to operate at a cell voltage of 3 V and a CO FE of 90%, which has been demonstrated experimentally (Fig. 2a).

When comparing the sequential route to the baseline integrated route, there is no foreseen overall energy advantage between the two routes (Fig. 3). The primary reason is the high energy requirement to convert CO₂, which offsets any foreseen energy benefits from process intensification. Considering the higher cost of electricity than heat, the integrated route in the baseline is in fact inferior to the sequential route due to its high electrical energy consumption (see Fig. 3b, c).

In the optimistic case, we assume the electrolysis of the captured CO₂ performs the same as the gas-fed electrolysis. In this scenario, the

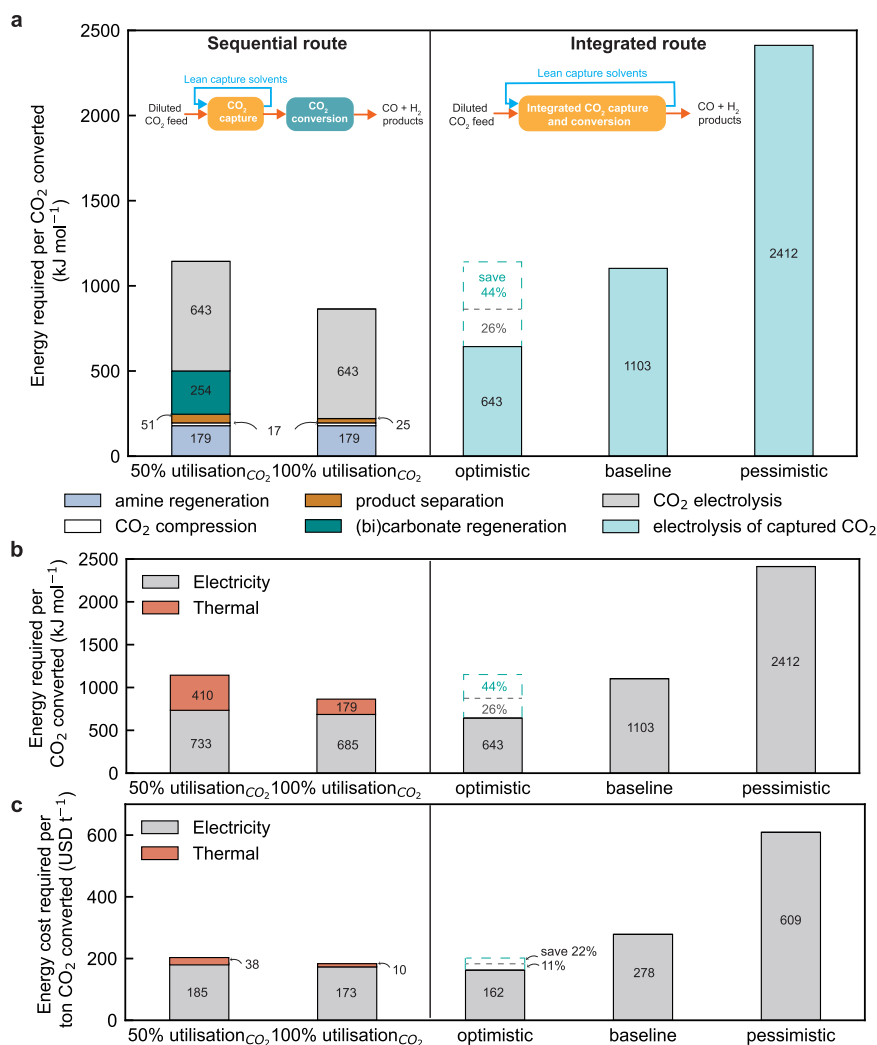


Fig. 3 | Energy comparison between sequential and integrated routes in different scenarios. Scenario analysis of (a) overall energy consumption, (b) thermal energy and electricity consumption, and (c) energy cost for sequential and integrated routes. In the sequential route, the CO₂ electrolyser includes state-of-the-art

gas-fed electrolysers that show 50% CO₂ utilisation or future scenarios with 100% CO₂ utilisation. The optimistic, baseline and pessimistic electrolyser cases for the integrated routes are compared against the sequential route.

integrated route can save up to 44% of total energy due to a low cell voltage, high CO Faradaic efficiency, and no thermal energy associated with regeneration of amines (179 kJ mol_{CO₂}⁻¹) and (bi)carbonate (254 kJ mol_{CO₂}⁻¹), and electricity associated with CO₂ compression (17 kJ mol_{CO₂}⁻¹), and product purification (51 kJ mol_{CO₂}⁻¹). (Fig. 3b) The integrated route could save 22% energy cost over the sequential route. Such reduction in energy consumption renders the integrated route a more attractive option. Our results suggest most future research emphasis is placed on enhancing the Faradaic efficiency and cell voltages at industrially applicable current densities in order to reduce the

energy of the overall process. Without these conditions, the sequential route remains favourable.

In the pessimistic case, if the integrated route has a poor CO Faradaic efficiency (40%) and large cell voltage (5 V), however, the energy to drive integrated conversion is far higher (2412 kJ mol_{CO₂}⁻¹) than the gas-fed electrolyser, diminishing all the energy benefits from the process intensification. This scenario emphasises the importance of maximizing the two noted performance metrics.

Lastly, we assessed the energy consumption of the sequential route based on future CO₂ gas-fed electrolysis with 100% CO₂ utilization efficiency, meaning that no CO₂ gas will be lost into (bi)carbonate during gas-fed conversion. Very recent reports demonstrated the potential to improve CO₂ utilisation efficiency⁵³ by developing catalyst-membrane interface^{44,54}, optimising cell operating conditions (e.g., reducing CO₂ flow rates, increasing current densities, and optimising anolyte compositions and ionic strength)⁴⁶, or supplying protons towards the cathode to regenerate CO₂ from the (bi)carbonates, e.g., flowing strong acidic catholyte^{22,55}, applying cation-exchange membranes⁴⁴ or bipolar membrane⁵⁴ in a reverse mode. The single-pass conversion rate remains 50% in this optimistic sequential model, meaning that 50% of the inputted CO₂ feed converts to CO product and reduces the required pressure-swing absorption separation energy consumption. The total energy of such a sequential route is

Table 1 | Summary of CO Faradaic efficiency and cell voltages for the integrated electrolyser in different scenarios

Scenarios	CO FE (%)	Cell voltage (V)
Optimistic	90	3
Baseline	70	4
Pessimistic	40	5

In all three models, the CO₂ specific energy requirement is assumed to be 179 kJ mol_{CO₂}⁻¹ for amine regeneration, 16.5 kJ mol_{CO₂}⁻¹ for CO₂ compression, 51 kJ mol_{CO₂}⁻¹ PSA product separation, and 254 kJ mol_{CO₂}⁻¹ (including 231 kJ mol_{CO₂}⁻¹ heat duty and 23 kJ mol_{CO₂}⁻¹ electricity) for (bi)carbonate regeneration. All these values are based on reported literature as listed in Supplementary note 2.

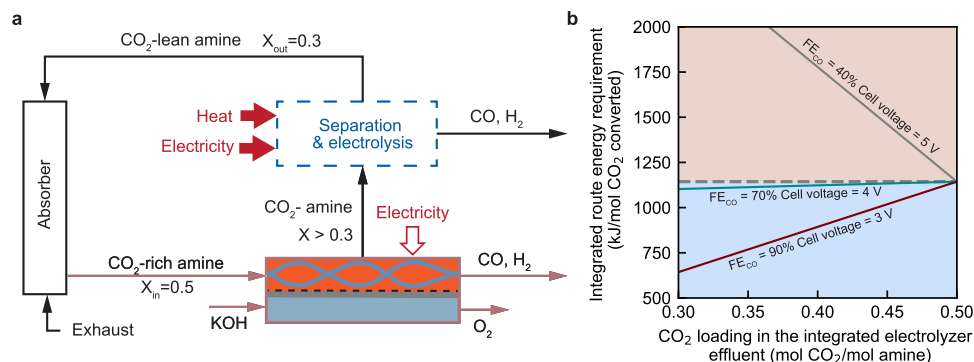


Fig. 4 | Effect of the single-pass conversion of the integrated electrolyser on the overall energy efficiency. **a** A schematic illustration of the integrated route where the electrolyser is unable to recover the capture media to the lean loading state. The separation and electrolysis process is symbolic process highlighted with a dashed box to regenerate the capture medium to the lean loading state. X represents the CO₂ loading in the capture medium, with a unit of mol CO₂ per mol amine molecule. **b** The energy comparison of the integrated route based on baseline

(green solid line), pessimistic (grey), and optimistic (red) integrated electrolyser as a function of the electrolyser single-pass conversion. The grey dashed line represents the energy consumption of the sequential route based on state-of-the-art gas-fed CO₂ electrolysers. The blue region means that the integrated route is more energy-efficient than the sequential route, while the orange region indicates vice-versa.

864 kJ mol⁻¹CO₂ (see Fig. 3). Here the integrated optimistic case then only maintains a maximum overall energy advantage of 26% and energy cost benefit of 11%. We then conclude that if the energy penalty associated with (bi)carbonate regeneration is solved, there would be substantially lower energy gain possible by integrating capture and conversion even in the most optimistic scenario as described in this article.

Overall, our comparison highlights that energy benefits brought by the integrated route strongly depend on the progress in enhancing the energy efficiencies of the CO₂ electrolysis process. This trend makes sense because the CO₂ electrochemical conversion is the dominant contributor to the overall energy consumption, which is the primary reason preventing straightforward CO₂ capture and utilisation at a low cost.

Single-pass conversion efficiency for the integrated electrolysis

In the analyses above, we assumed that the integrated electrolyser could recover the capture media to a lean loading state where it is directly recycled to the absorber (see Fig. 1b). If the electrolyser is unable to achieve the proposed lean state of 0.3 mol CO₂ mol_{amine}⁻¹, the high CO₂ loading ($X > 0.3$) in the lean amine stream will decrease the CO₂ absorption rate in the absorber unit. To maintain the overall CO₂ capture and conversion capacity of the process, adjustments to the process in Fig. 1b would then be needed. Here we discuss two possibilities, both of which will incur either additional capital or energy costs for the process.

One possible adjustment to account for lower conversions in the integrated electrolyser is to increase the size of the absorber unit (Supplementary Fig. 4). A smaller difference between the low and high CO₂ loading states will then be present and a larger absorber allows for the same CO₂ capture capacity. Previous reports analysing the impacts on absorber size and capture costs of higher lean loading states indicate that an increase in lean loading from 0.3 to >0.4 mol CO₂ mol_{amine}⁻¹ would require 20–38% more capture costs^{62,63}. With the electrolyser unit dominating the energy costs, however, these increased capture costs would be less substantial when considering the complete process. This option is also at a high technology readiness level.

A second option to maintain CO₂ capture and conversion capacity would be to add a secondary step after the integrated electrolyser, which is a smaller version of the stripper and gas-fed electrolyser unit from the sequential process (Fig. 4a). The energy implications of this option have yet to be explored in literature and will be examined within this section. In essence, this analysis examines the role of the single-pass conversion of the integrated electrolyser.

In the model, we included a symbolic process (including amine regeneration, gas-fed CO₂ electrolysis, product separation, and (bi) carbonate regeneration, shown in Fig. 4a) to regenerate the capture medium to the lean loading state and convert the rest of captured CO₂ to CO. In this case, the captured CO₂ in the effluent stream of the integrated electrolyser needs to be recovered to pure CO₂ gas from the regeneration unit and then fed into the gas-fed electrolyser for conversion.

We find that the role of the single-pass conversion efficiency is highly dependent on the performance of the integrated electrolyser. When the electrolyser operates at the baseline conditions, the capability of the integrated electrolyser to regenerate the capture medium becomes insignificant to the energy advantage of the integrated route. In contrast, if the electrolyser operates under either optimistic or pessimistic conditions, the single-pass conversion is essential for the overall energy consumption of the integrated route. The overall energy will benefit from an efficient electrolyser with high single-pass conversion. In contrast, a poorly performing electrolyser causes a significant overall energy penalty by increasing the single-pass conversion. This observation arises from the dominant role of the electrolysis in the overall energy of the capture and conversion process.

Parameter sweeps of the integrated route

Here we briefly highlight how varied performance metrics of Faradaic efficiency and cell voltage impact the overall energy requirements for the integrated route. This analysis assumes the electrolyser can recover the capture medium to the lean loading state. Such an analysis provides a deeper context than the described optimistic, baseline and pessimistic scenarios above. Supplementary Fig. 5a shows that the energy advantage from the integrated route plummets linearly with the energy consumption of the integrated electrolysis. This trend highlights the core role of the electrolyser in determining the overall energy efficiency. The breakeven point for the integrated route is at the energy consumption of 1143 kJ mol⁻¹ for the integrated electrolyser (see Supplementary Fig. 5a). The value of the breakeven point should vary with the energy efficiency of the gas-fed electrolyser and the operating conditions, such as the single-pass conversion of the gas-fed electrolyser, energies to regenerate (bi)carbonate, amines, and to separate CO₂ and product. (see Supplementary Fig. 6).

The role of CO Faradaic efficiency and cell voltages were examined individually in influencing the energy gain from an integrated route. Supplementary Fig. 5b shows the breakeven point for CO Faradaic efficiency with varied cell voltages: the breakeven Faradaic efficiency is 51% at 3 V, 67% at 4 V, and 84% at 5 V. The impact from the

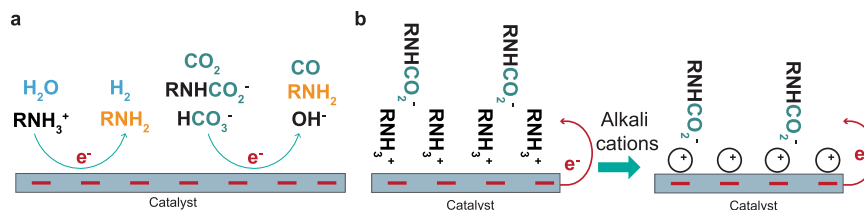


Fig. 5 | Speciation of amine-based capture media in sequential and integrated routes and their impacts on CO_2 electrochemical conversion. **a** Proposed integrated CO_2 absorption and electrolysis routes in amine-based solvents.

b Schematic illustration of the role of alkali cations which promote interfacial charge transfer from the catalyst surface to the carbamate ions.

Faradaic efficiency is more significant than from the cell voltages, as shown in Supplementary Fig. 5b, c. The energy advantage from the integrated route decreases linearly with an increase of cell voltages and diminishes at 4.1 V when the Faradaic efficiency is 70%. Similarly, the breakeven cell voltages increase if the CO Faradaic efficiency could be further enhanced. Our analysis result indicates that the integrated CO_2 conversion as reported by Lee et al.²², as shown in Fig. 2a, has the potential to achieve a more energy-efficient integrated route. Our model did not consider the cost associated with the current densities, which predetermine the capital cost of the electrolyzers. Like the gas-fed CO_2 electrolyzers, we believe operating at more than 200 mA cm^{-2} with a high product selectivity is a prerequisite for an industrially relevant integrated system⁶⁴.

Outlook for future integrated electrolysis

Our results identified that the electrochemical CO_2 conversion is the primary energy contributor for both sequential and integrated CO_2 capture and electrochemical conversion process. The reported energy efficiency of the integrated electrolyser is generally lower than the gas-fed CO_2 electrolysis. Such limitation originates from (1) the low surface coverage of reactants at the catalyst surface at industrially relevant rates and (2) the limited number of active sites the medium can reach over the hydrophobic gas-diffusion electrodes²². Therefore, the following research questions should be answered to advance the integrated electrolyzers.

What are the primary catalytically active species? It has been reported recently that the catalysts for gas-fed CO_2 electroreduction are selective to reduce CO_2 captured by amine-based capture media (RNH_2)^{22,43,44,58}. In the CO_2 -rich amines, the zwitterions ions including RNHCO_2^- and RNH_3^+ are the major CO_2 species in the case of 30 wt% monoethanolamine aqueous solution when the CO_2 loading is below 0.4–0.6 mol CO_2 per mol amine^{32,33}. Further increase of CO_2 loadings could promote carbamate hydrolysis to produce (bi)carbonates. Therefore, the CO_2 associated species should include carbamate ions, (bi)carbonate ions, and minor free dissolved CO_2 , all may contribute to the CO_2 conversion.

However, there are still debates on the primary catalytically active species for the conversion in the amine (particularly for monoethanolamine) solutions. (see Fig. 5a) An early report by Chen et al.⁴³ claims that the free CO_2 dissolved in water can be the primary active species for the conversion, with nearly 100% Faradaic efficiency of hydrogen evolution regardless of the carbamate concentrations. In contrast, recent reports argued the possibility to reduce the carbamate ions as the main active reagent^{22,61}. The claimed mechanisms for the direct carbamate reduction are different from the reduction mechanisms in CO_2 electrolysis⁵² and direct bicarbonate reduction^{65,66}. Interestingly, these recent reports also show an improvement of CO_2 conversion selectivity by increasing operating temperatures^{22,45}, which help release free CO_2 . Therefore, the primary catalytically reactant for CO_2 conversion still remains a mystery but is paramount for the rational development of an efficient electrochemical system for integration.

In the CO_2 capture step based on 30 wt% monoethanolamine solutions, the CO_2 loadings are usually at 0.3–0.5 mole CO_2 per mole amine, meaning that the concentrations of the (bi)carbonate and free CO_2 are negligible. If the free CO_2 is the primary active reagent, regenerating and concentrating free CO_2 from carbamate and bicarbonate should be the key step to improving the integrated CO_2 conversion. Meanwhile, this strategy could adversely impact CO_2 capture. If the carbamate ions are the primary catalytically active species, they could be repelled by the negatively charged cathode surface, which might limit the coverage of reactants, especially at high overpotentials. Additionally, the active species need to diffuse to the negatively charged electrode through a thick hydrodynamic boundary layer usually $>40 \mu\text{m}$, if the integrated reactor configuration is similar to a CO_2 -fed aqueous H-cell electrolyser (see Supplementary Fig. 7 for a comparison of aqueous versus gas-fed mass transport in CO_2 electrolysis)^{67,68}. Efforts to improve integrated conversion at elevated current densities should then take such transport into consideration when designing such systems.

The results of our energy analysis indicate that the capture media for the integrated route could be designed to favour CO_2 conversion at a reasonable cost on CO_2 absorption. Therefore, an interdisciplinary collaboration between CO_2 capture and electrolysis is highly important to advance the integrated route.

What are the pathways for the regeneration of the capture media?

Complex homogenous equilibrium reactions often take place in the CO_2 -capture medium system. In the sequential route, heating is required to drive the reactions towards the recovery of capture media and CO_2 . Whereas the integrated route, as shown in Fig. 1b, uses electrochemical reactions to regenerate the capture medium via reduction of absorbed CO_2 and chemical-induced equilibria shift to the original states of the capture medium (see an example in Fig. 5a). Therefore, understanding the reaction equilibria under CO_2 electroreduction conditions is vital to the identification of chemical pathways to recover capture media inside the integrated electrolyser.

Similar to the gas-fed CO_2 electroreduction, hydroxide ions should also be produced at the catalyst surface as a by-product of water reduction and increase the pH locally around the electrode⁶⁹. A prior report⁷⁰ has shown that the addition of a strong base (e.g., sodium hydroxide) to the CO_2 -amine system could result in the formation of free amines and carbonate at the end equivalent points. As such, we could anticipate the formation of carbonate ions close to the electrode surface from the reactions between the hydroxide ions and unreacted CO_2 species. These carbonate ions could either reverse back to carbamate, free CO_2 , or bicarbonate by reacting with the protons from the membrane^{70,71} or stay as carbonate if additional cations are introduced into the cathode channel. The latter situation may cause operational issues for the integrated route such as inefficient CO_2 conversion, alteration of solvent chemistry, and potential carbonate salt precipitation from the solvent. Hence a dedicated control and balance of ions within the electrolyser also become critical in achieving an efficient amine recovery when using electrochemical CO_2 reduction as a regeneration step.

How to improve integrated electrolyser performance? Including alkali cations such as potassium ions (K^+) or caesium ions (Cs^+) in the amine capture medium has shown its potential to improve CO_2 conversion efficiency²². As proposed by Lee et al.²², the carbamate reduction can occur through an interfacial charge transfer mechanism, where the alkali cations can be packed (instead of protonated amines) at the electrode surface and facilitate charge transfer from the electrode surface to the carbamate ions, as illustrated in Fig. 5b. Meanwhile, an increasing number of reports also highlighted the essential role of alkali cations in activating gas-fed CO_2 electrochemical conversion^{36,72,73}. Hence, the cations could synergistically minimise the surface coverage of protonated amines and activate CO_2 electroreduction. Nevertheless, the electrochemical reduction of the captured CO_2 is still low in CO Faradaic efficiency at $>200\text{ mA cm}^{-2}$, which could also be partially related to the limited electrochemical area due to the use of planar metal electrodes⁴³ or the hydrophobic nature of the gas-diffusion electrodes that are frequently used for gas-fed electrolysis²².

We anticipate a significant improvement in CO_2 conversion rates ($>200\text{ mA cm}^{-2}$) by implementing new electrode structures such as hydrophilic 3D structured flow-through electrodes and optimised capture media^{74,75}. The required diffusion distances of active species to achieve industrially applicable current densities are highly dependent on the concentrations and diffusion coefficients of the active species⁷⁶. Therefore, understanding the primary active species and tailoring the local reaction environment could be effective in enhancing the CO_2 conversion rate in the integrated electrolysers.

Further, the desired wetting condition for the CO_2 conversion should have maximized solid-liquid interfaces with a minimal contact area of the gas bubble with the electrode surface. This means that the electrode surface should be hydrophilic, which is different from the desired wettability of gas-diffusion electrodes. Using metallic porous flow through electrodes is expected to achieve a high rate of CO_2 conversion by maximizing the electrochemical surface area, reducing the thickness of the boundary layer, and accelerating the detachment of gas products. On the other hand, more experimental and theoretical efforts are also essential to understand the potential catalyst surface restructuring, local reaction environment (e.g., pH and local concentration of amine species), and multiphase and ion transports in the cells, which have been demonstrated important for the stability and efficiency of the gas-fed CO_2 electrolysis⁷⁷⁻⁷⁹.

Discussion

Lastly, a directly coupled CO_2 capture and electrochemical conversion could potentially save close to 44% energy consumption and 21% energy cost versus a sequential process based on the state-of-the-art gas-fed CO_2 electrolysers, if the integrated electrolysis performs similarly to the gas-fed electrolysis (3 V and 90% CO Faraday efficiency) and has a high single-pass conversion efficiency to achieve the CO_2 -lean state of the amines. However, this energy benefit drops from 44% to only 26% if new gas-fed CO_2 electrolysers with no CO_2 loss to (bi) carbonates emerged at high current densities. Our sensitivity analysis results suggest that research efforts should target an overall energy consumption at least similar to the gas-fed electrolyser performance for the integrated conversion cells so that the operational cost would not diminish the capital cost reduction from the process intensification. Although this work is a case study on the coupled amine scrubbing and CO_2 -to-CO electrochemical conversion, our simple approach is anticipated to help researchers quickly understand the upper energy limits and targeted performance metrics for different integrated CO_2 capture and electrolysis processes. Collectively we hope this work provides a benchmark for integrated electrolysis research and provides a perspective to researchers and funding bodies seeking to achieve low-cost carbon capture and electrochemical utilisation processes through process integration.

Methods

Estimation of the specific energy required to electrochemically convert CO_2

We calculated the CO_2 -specific energy requirement to produce CO from:

$$\text{Energy required to convert 1 mol } CO_2 = \frac{E_{\text{cell}} \times j \times z \times F}{FE_{CO} \times j} \quad (6)$$

where E_{cell} stands for cell voltage, j for current density, FE for Faradaic efficiency, F for Faraday constant, z for the number of charges to convert one CO_2 molecule ($z = 2$ for CO product).

We estimated the cell voltage by combining the estimated potential from anode, cathode, and ohmic loss. We did not consider the contribution from the Nernstian overpotential. We assumed the anode reaction for both gas-fed and integrated electrolysers is water oxidation from 1 M KOH basic solutions and described the reaction by using the Tafel equation. The potentials of cathode and ohmic loss from catholyte (CO_2 -amine system with and without salts), anolyte, and membrane were calculated based on literature data. More details are discussed in the Supplementary Note 1.

$$E_{\text{cell}} = E_{\text{anode}} - E_{\text{cathode}} + \eta_{\text{ohm}} \quad (7)$$

Mole and energy balances over the sequential and integrated routes

For simplicity of the analyses, the models only include the primary energy contributors, including the stripper, CO_2 compression, electrolysis, (bi)carbonate regeneration, and product separation. We conducted the mole balances of CO_2 and carbon over the electrolyser and calculated the CO_2 -normalised energy requirement for each unit operations. The models are assumed to be in steady state with no losses of CO_2 or products. Most of the data are sourced from the literature data, which is summarised in Supplementary Note 2.

In our assumptions, more specifically, the amine scrubbing process used 30 wt% (or 5 M) monoethanolamine aqueous solution as the capture medium, with a CO_2 -rich loading of $0.5\text{ mol}_{CO_2}\text{ mol}_{\text{amine}}^{-1}$ and a lean loading of $0.3\text{ mol}_{CO_2}\text{ mol}_{\text{amine}}^{-1}$ at the baseline conditions. The heat duty to recover CO_2 and amines is assumed to be $179\text{ kJ mol}_{CO_2}^{-1}$ at the baseline to reflect a higher technical readiness level for proof of concept. The compression of CO_2 is assumed to be $16.5\text{ kJ mol}_{CO_2}^{-1}$.

The baseline gas-fed CO_2 electrolyser has a 50% single-pass conversion and a 50% CO_2 utilisation efficiency, meaning that the 25% of the inputted CO_2 is converted to CO and the other 25% is converted to (bi)carbonate. In the optimistic case, the gas-fed electrolyser is assumed to be operated at 100% CO_2 utilisation, so no (bi)carbonate regeneration unit was included in this case. The recovery of CO_2 from the (bi)carbonate is estimated to be 254 kJ mol^{-1} , including $231\text{ kJ mol}_{CO_2}^{-1}$ heat duty and 23 kJ mol^{-1} electricity⁴. The only products from the electrolysers are hydrogen and CO. The pressure swing adsorption serves to purify the product and recover the CO_2 for further conversion.

The baseline integrated electrolyser is assumed to recover the CO_2 -lean amine and convert the absorbed CO_2 to CO. We assumed no downstream product separation is required for the integrated route. In the case where the recovery is incomplete, our analyses are focused on the additional energy requirement from the incorporation of additional process to recover and convert CO_2 as shown in Fig. 4a. We assumed the electricity is from low-carbon or zero-carbon power generation at a price of US\$ 0.04 per kWh²³, and the heat duty from natural gas at a price of US\$2.69 per million British Thermal Units⁸⁰. At last, we performed the parameter sweep analyses to identify the effects of the key parameters on the overall energy requirement of the

sequential and integrated processes⁸¹. The detailed calculations and data are summarized in Supplementary Note 2.

Data availability

The data generated in this study have been deposited in <https://doi.org/10.5281/zenodo.7025326>.

Code availability

The code for the model and figures is available from GitHub under <https://doi.org/10.5281/zenodo.7025326>.

References

- Sullivan, I. et al. Coupling electrochemical CO₂ conversion with CO₂ capture. *Nat. Catal.* **4**, 952–958 (2021).
- Rochelle, G. T. Amine scrubbing for CO₂ capture. *Science* **325**, 1652–1654 (2009).
- Zhang, S., Chen, C., Li, K., Yu, H. & Li, F. Materials and system design for direct electrochemical CO₂ conversion in capture media. *J. Mater. Chem. A* **9**, 18785–18792 (2021).
- Keith, D. W., Holmes, G., St. Angelo, D. & Heidel, K. A process for capturing CO₂ from the atmosphere. *Joule* **2**, 1573–1594 (2018).
- Climeworks. *Direct air capture to help reverse climate change*, <<https://climeworks.com/co2-removal>> (2021).
- Tollefson, J. in *Nature* Vol. 558 (Nature, 2018).
- Luna, P. D. et al. What would it take for renewably powered electrosynthesis to displace petrochemical processes? *Science* **364**, eaav3506 (2019).
- Arquer, F. P. G. et al. CO₂ electrolysis to multicarbon products at activities greater than 1 A cm⁻². *Science* **367**, 661–666 (2020).
- Higgins, D., Hahn, C., Xiang, C., Jaramillo, T. F. & Weber, A. Z. Gas-diffusion electrodes for carbon dioxide reduction: a new paradigm. *ACS Energy Lett.* **4**, 317–324 (2019).
- Rabiee, H. et al. Gas diffusion electrodes (GDEs) for electrochemical reduction of carbon dioxide, carbon monoxide, and dinitrogen to value-added products: a review. *Energy Environ. Sci.* **14**, 1959–2008 (2021).
- van Bavel, S., Verma, S., Negro, E. & Bracht, M. Integrating CO₂ Electrolysis into the Gas-to-Liquids–Power-to-Liquids Process. *ACS Energy Lett.* **5**, 2597–2601 (2020).
- Alerte, T., et al Downstream of the CO₂ electrolyzer: assessing the energy intensity of product separation. *ACS Energy Lett.*, 4405–4412, <https://doi.org/10.1021/acscenergylett.1c02263> (2021).
- Shin, H., Hansen, K. U. & Jiao, F. Techno-economic assessment of low-temperature carbon dioxide electrolysis. *Nat. Sustainability* **4**, 911–919 (2021).
- Sisler, J. et al. Ethylene electrosynthesis: a comparative techno-economic analysis of alkaline vs membrane electrode assembly vs CO₂–CO–C₂H₄ Tandems. *ACS Energy Lett.* **6**, 997–1002 (2021).
- Jens, C. M., Müller, L., Leonhard, K. & Bardow, A. To Integrate or Not to Integrate—Techno-Economic and Life Cycle Assessment of CO₂ Capture and Conversion to Methyl Formate Using Methanol. *ACS Sustain. Chem. Eng.* **7**, 12270–12280 (2019).
- Maina, J. W. et al. Strategies for integrated capture and conversion of CO₂ from dilute flue gases and the atmosphere. *ChemSusChem* **14**, 1805–1820 (2021).
- Yang, K. et al. Cation-driven increases of CO₂ utilization in a bipolar membrane electrode assembly for CO₂ electrolysis. *ACS Energy Lett.*, 4291–4298, <https://doi.org/10.1021/acscenergylett.1c02058> (2021).
- Rabinowitz, J. A. & Kanan, M. W. The future of low-temperature carbon dioxide electrolysis depends on solving one basic problem. *Nat. Commun.* **11**, 5231 (2020).
- Kas, R. et al. Modeling the local environment within porous electrode during electrochemical reduction of bicarbonate. *Ind. Eng. Chem. Res.*, <https://doi.org/10.1021/acs.iecr.2c00352> (2022).
- McCallum, C. et al. Reducing the crossover of carbonate and liquid products during carbon dioxide electroreduction. *Cell Rep. Phys. Sci.* **2**, 100522 (2021).
- Li, M. et al. The role of electrode wettability in electrochemical reduction of carbon dioxide. *J. Mater. Chem. A* **9**, 19369–19409 (2021).
- Lee, G. et al. Electrochemical upgrade of CO₂ from amine capture solution. *Nat. Energy* **6**, 46–53 (2021).
- Yue, P. et al. Life cycle and economic analysis of chemicals production via electrolytic (bi)carbonate and gaseous CO₂ conversion. *Appl. Energy* **304**, 117768 (2021).
- Gjernes, E. et al. Results from 30 wt% MEA performance testing at the CO₂ technology centre mongstad. *Energy Procedia* **114**, 1146–1157 (2017).
- Team, T. I. E. C. M. Amine-based post-combustion CO₂ capture. (Department of Engineering and Public Policy, Carnegie Mellon University, Pittsburgh, PA 15213, 2019).
- Renfrew, S. E., Starr, D. E. & Strasser, P. Electrochemical approaches toward CO₂ capture and concentration. *ACS Catal.* **10**, 13058–13074 (2020).
- Lin, Y.-J., Chen, E. & Rochelle, G. T. Pilot plant test of the advanced flash stripper for CO₂ capture. *Faraday Discuss.* **192**, 37–58 (2016).
- Lin, Y.-J. & Rochelle, G. T. Approaching a reversible stripping process for CO₂ capture. *Chem. Eng. J.* **283**, 1033–1043 (2016).
- Idem, R. et al. Practical experience in post-combustion CO₂ capture using reactive solvents in large pilot and demonstration plants. *Int. J. Greenh. Gas. Control* **40**, 6–25 (2015).
- Jackson, S. & Brodal, E. A comparison of the energy consumption for CO₂ compression process alternatives. *IOP Conf. Ser.: Earth Environ. Sci.* **167**, 012031 (2018).
- IECM. Amine-based Post-Combustion CO₂ Capture. (Carnegie Mellon University, Pittsburgh, PA 15213, 2019).
- Fan, G.-j, Wee, A. G. H., Idem, R. & Tontiwachwuthikul, P. NMR studies of amine species in MEA–CO₂–H₂O system: modification of the model of vapor–liquid equilibrium (VLE). *Ind. Eng. Chem. Res.* **48**, 2717–2720 (2009).
- Simoës, M. C., Hughes, K. J., Ingham, D. B., Ma, L. & Pourkashanian, M. Predicting speciation of ammonia, monoethanolamine, and diethanolamine using only ionic radius and ionic charge. *Ind. Eng. Chem. Res.* **57**, 2346–2352 (2018).
- Huang, J. E. et al. CO₂ electrolysis to multicarbon products in strong acid. *Science* **372**, 1074–1078 (2021).
- Ma, M. et al. Insights into the carbon balance for CO₂ electroreduction on Cu using gas diffusion electrode reactor designs. *Energy Environ. Sci.* **13**, 977–985 (2020).
- Endrődi, B. et al. Operando cathode activation with alkali metal cations for high current density operation of water-fed zero-gap carbon dioxide electrolyzers. *Nat. Energy* **6**, 439–448 (2021).
- Weng, L.-C., Bell, A. T. & Weber, A. Z. Towards membrane-electrode assembly systems for CO₂ reduction: a modeling study. *Energy Environ. Sci.* **12**, 1950–1968 (2019).
- Larrazábal, G. O. et al. Analysis of mass flows and membrane crossover in CO₂ reduction at high current densities in an MEA-type electrolyzer. *ACS Appl. Mater. Interfaces* **11**, 41281–41288 (2019).
- Riboldi, L. & Bolland, O. Overview on pressure swing adsorption (PSA) as CO₂ capture technology: state-of-the-art, limits and potentials. *Energy Procedia* **114**, 2390–2400 (2017).
- Siqueira, R. M. et al. Carbon dioxide capture by pressure swing adsorption. *Energy Procedia* **114**, 2182–2192 (2017).
- Shah, G., Ahmad, E., Pant, K. K. & Vijay, V. K. Comprehending the contemporary state of art in biogas enrichment and CO₂ capture technologies via swing adsorption. *Int. J. Hydrog. Energy* **46**, 6588–6612 (2021).
- ToolBox, E. *Solubility of gases in water.*, <https://www.engineeringtoolbox.com/gases-solubility-water-d_1148.html>

43. Chen, L. et al. Electrochemical reduction of carbon dioxide in a monoethanolamine capture medium. *ChemSusChem* **10**, 4109–4118 (2017).
44. Abdinejad, M., Mirza, Z., Zhang, X.-A. & Kraatz, H.-B. Enhanced electrocatalytic activity of primary amines for CO₂ reduction using copper electrodes in aqueous solution. *ACS Sustain. Chem. Eng.* **8**, 1715–1720 (2020).
45. Pérez-Gallent, E., Vankani, C., Sánchez-Martínez, C., Anastasopol, A. & Goetheer, E. Integrating CO₂ capture with electrochemical conversion using amine-based capture solvents as electrolytes. *Ind. Eng. Chem. Res.* **60**, 4269–4278 (2021).
46. Ahmad, N. et al. Electrochemical CO₂ reduction to CO facilitated by MDEA-based deep eutectic solvent in aqueous solution. *Renew. Energy* **177**, 23–33 (2021).
47. Li, L., Yang, J., Li, L., Huang, Y. & Zhao, J. Electrolytic reduction of CO₂ in KHCO₃ and alkanolamine solutions with layered double hydroxides intercalated with gold or copper. *Electrochim. Acta* **402**, 139523 (2022).
48. Nitopi, S. et al. Progress and perspectives of electrochemical CO₂ reduction on copper in aqueous electrolyte. *Chem. Rev.* **119**, 7610–7672 (2019).
49. Garg, S. et al. Advances and challenges in electrochemical CO₂ reduction processes: an engineering and design perspective looking beyond new catalyst materials. *J. Mater. Chem. A* **8**, 1511–1544 (2020).
50. Krause, R. et al. Industrial application aspects of the electrochemical reduction of CO₂ to CO in aqueous electrolyte. *Chem. Ing. Tech.* **92**, 53–61 (2020).
51. Masel, R. I. et al. An industrial perspective on catalysts for low-temperature CO₂ electrolysis. *Nat. Nanotechnol.* **16**, 118–128 (2021).
52. Zhu, S., Li, T., Cai, W.-B. & Shao, M. CO₂ electrochemical reduction as probed through infrared spectroscopy. *ACS Energy Lett.* **4**, 682–689 (2019).
53. Nesbitt, N. T. et al. Liquid–solid boundaries dominate activity of CO₂ reduction on gas-diffusion electrodes. *ACS Catal.* **10**, 14093–14106 (2020).
54. Vass, Á., et al. Local chemical environment governs anode processes in CO₂ electrolyzers. *ACS Energy Lett.*, 3801–3808, <https://doi.org/10.1021/acsenergylett.1c01937> (2021).
55. O'Brien, C. P. et al. Single pass CO₂ conversion exceeding 85% in the electrosynthesis of multicarbon products via local CO₂ regeneration. *ACS Energy Lett.* **6**, 2952–2959 (2021).
56. Xu, Y. et al. Self-cleaning CO₂ reduction systems: unsteady electrochemical forcing enables stability. *ACS Energy Lett.* **6**, 809–815 (2021).
57. Gilliam, R. J., Graydon, J. W., Kirk, D. W. & Thorpe, S. J. A review of specific conductivities of potassium hydroxide solutions for various concentrations and temperatures. *Int. J. Hydrog. Energy* **32**, 359–364 (2007).
58. Diaz, L. A. et al. Electrochemical production of syngas from CO₂ captured in switchable polarity solvents. *Green. Chem.* **20**, 620–626 (2018).
59. Lee, Y. J. & Rochelle, G. T. Oxidative degradation of organic acid conjugated with sulfite oxidation in flue gas desulfurization: products, kinetics, and mechanism. *Environ. Sci. Technol.* **21**, 266–272 (1987).
60. Buvik, V., Wanderley, R. R. & Knuutila, H. K. Addition of potassium iodide reduces oxidative degradation of monoethanolamine (MEA). *Chem. Eng. Sci.: X* **10**, 100096 (2021).
61. Khurram, A., Yan, L., Yin, Y., Zhao, L. & Gallant, B. M. Promoting amine-activated electrochemical CO₂ conversion with alkali salts. *J. Phys. Chem. C* **123**, 18222–18231 (2019).
62. Aroonwilas, A. & Veawab, A. Integration of CO₂ capture unit using blended MEA–AMP solution into coal-fired power plants. *Energy Procedia* **1**, 4315–4321 (2009).
63. Raksajati, A., Ho, M. T. & Wiley, D. E. Reducing the cost of CO₂ capture from flue gases using aqueous chemical absorption. *Ind. Eng. Chem. Res.* **52**, 16887–16901 (2013).
64. Burdyny, T. & Smith, W. A. CO₂ reduction on gas-diffusion electrodes and why catalytic performance must be assessed at commercially-relevant conditions. *Energy Environ. Sci.* **12**, 1442–1453 (2019).
65. Li, T. et al. Electrolytic conversion of bicarbonate into CO in a flow cell. *Joule* **3**, 1487–1497 (2019).
66. Zhu, S., Jiang, B., Cai, W.-B. & Shao, M. Direct observation on reaction intermediates and the role of bicarbonate anions in CO₂ electrochemical reduction reaction on Cu surfaces. *J. Am. Chem. Soc.* **139**, 15664–15667 (2017).
67. Clark, E. L. et al. Standards and protocols for data acquisition and reporting for studies of the electrochemical reduction of carbon dioxide. *ACS Catal.* **8**, 6560–6570 (2018).
68. Weng, L.-C., Bell, A. T. & Weber, A. Z. Modeling gas-diffusion electrodes for CO₂ reduction. *Phys. Chem. Chem. Phys.* **20**, 16973–16984 (2018).
69. Li, M., Yang, K., Abdinejad, M., Zhao, C. & Burdyny, T. Advancing integrated CO₂ electrochemical conversion with amine-based CO₂ capture: a review. *Nanoscale*, <https://doi.org/10.1039/D2NR03310K> (2022).
70. Matin, N. S., Remias, J. E., Neathery, J. K. & Liu, K. Facile Method for Determination of Amine Speciation in CO₂ Capture Solutions. *Ind. Eng. Chem. Res.* **51**, 6613–6618 (2012).
71. Lv, B., Guo, B., Zhou, Z. & Jing, G. Mechanisms of CO₂ capture into monoethanolamine solution with different CO₂ loading during the absorption/desorption processes. *Environ. Sci. Technol.* **49**, 10728–10735 (2015).
72. Monteiro, M. C. O. et al. Absence of CO₂ electroreduction on copper, gold and silver electrodes without metal cations in solution. *Nat. Catal.* **4**, 654–662 (2021).
73. Ringe, S. et al. Understanding cation effects in electrochemical CO₂ reduction. *Energy Environ. Sci.* **12**, 3001–3014 (2019).
74. Beck, V. A. et al. Inertially enhanced mass transport using 3D-printed porous flow-through electrodes with periodic lattice structures. *Proc. Natl Acad. Sci.* **118**, e2025562118 (2021).
75. Lölsberg, J. et al. 3D-Printed Electrodes with Improved Mass Transport Properties. *ChemElectroChem* **4**, 3309–3313 (2017).
76. Jinli, Q., Yuyu, L. & Jiujuun, Z. in *Electrochemical Reduction of Carbon Dioxide* Ch. Electrode Kinetics of CO Electroreduction, (CRC Press, 2016).
77. Arán-Ais, R. M., Scholten, F., Kunze, S., Rizo, R. & Roldán Cuenya, B. The role of in situ generated morphological motifs and Cu(i) species in C₂+ product selectivity during CO₂ pulsed electroreduction. *Nat. Energy* **5**, 317–325 (2020).
78. Xing, Z., Hu, L., Ripatti, D. S., Hu, X. & Feng, X. Enhancing carbon dioxide gas-diffusion electrolysis by creating a hydrophobic catalyst microenvironment. *Nat. Commun.* **12**, 136 (2021).
79. Lees, E. W., Mowbray, B. A. W., Parlane, F. G. L. & Berlinguette, C. P. Gas diffusion electrodes and membranes for CO₂ reduction electrolyzers. *Nat. Rev. Mater.*, <https://doi.org/10.1038/s41578-021-00356-2> (2021).
80. mundi, i. *Henry Hub Natural Gas Futures End of Day Settlement Price*, <<https://www.indexmundi.com/commodities/?commodity=natural-gas&months=60>> (2022).
81. Han, S.-J. & Wee, J.-H. Estimation of the amount of CO₂ absorbed by measuring the variation of electrical conductivity in highly concentrated monoethanolamine solvent systems. *J. Chem. Eng. Data* **61**, 712–720 (2016).

Acknowledgements

T.B. and M.L. would like to acknowledge the European Union's Horizon 2020 research and innovation program under grant agreement No.

85144 (SELECT-CO2). T.B. would also like to acknowledge the NWO for an individual Veni grant.

Author contributions

M.L. and T.B. wrote the manuscript. M.L. built the models. M.L., E.I., T.B., H.M., and M.A. performed the data analyses and visualisation. T.B. supervised the study. All authors contributed to the manuscript.

Competing interests

The authors declare no competing interests.

Additional information

Supplementary information The online version contains supplementary material available at <https://doi.org/10.1038/s41467-022-33145-8>.

Correspondence and requests for materials should be addressed to Thomas Burdyny.

Peer review information *Nature Communications* thanks Ung Lee and the other, anonymous, reviewer(s) for their contribution to the peer review of this work. Peer reviewer reports are available.

Reprints and permission information is available at <http://www.nature.com/reprints>

Publisher's note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

Open Access This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons license, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons license and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this license, visit <http://creativecommons.org/licenses/by/4.0/>.

© The Author(s) 2022